## meridian 🙏

### **HID525 - Touch-Free Ice & Water Dispenser**

Nugget Ice Machine / Dispenser

### The Meridian® Difference

#### Sanitation:

- Touch-free, infrared dispensing of ice and water eliminates the need to physically touch the dispenser for more sanitary operation
- AgION® and other antimicrobial compounds are molded into key components to help inhibit the growth of microbes, bacteria, mold and algae
- Fully removable bin, spouts, air filter, sink, and grill allow for easy cleaning and
- Sealed refrigeration system minimizes outside airborne contamination
- Front accessible, removable air filter makes cleaning more convenient

#### Reliability & Ease of Use:

- Sealed, maintenance-free bearings reduce preventative maintenance and ensure maximum reliability
- Produces Scotsman's chewable H<sup>2</sup> Nugget Ice which is slow-melting and designed for reliable dispensing
- Space-maximizing design the industry's smallest operational footprint relative to capacity, featuring specially designed contoured sides for enhanced breathability
- SmoothStream<sup>™</sup> water dispensing technology reduces splashing to keep the machine and surrounding areas clean
- Unit-specific QR code for quick access to service manuals and warranty history
- Durable stainless-steel evaporator and exterior panels, plus larger sink opening and dispensing area
- Enhanced service features Intuitive LED diagnostic lights reduce service time and convenient USB drive allows for fast software updates
- Industry-leading energy and water efficiency along with guieter operation






Sealed, maintenance-free bearings ensure maximum reliability and contribute to a long machine life

HID525A-1 with optional KLP24A legs







User controlled antimicrobial push-button dispensing option, providing quick and efficient operation



### 24 Hour Volume Production

Ai	Air Cooled			Water Cooled			
70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C		
500/227 lb/kg		365/166 lb/kg	500/227 lb/kg		400/181 lb/kg		

# Specifications

				Storage		Max. Fuse Size		Energy Consumption		Usage (liters/45.4 kg)
Model Number	Conde r Un		Dispensing Method	Capacity lb/kg	Basic Electrical Volts/Hz/Phase	or HACR Circuit Breaker (amps)	Min. Circuit Amps	kWh/100 lb 90°F(32°C)/70°F(21°C)	Potable 90°F(32°C	Condenser )/70°F(21°C)
HID525A	<b>∖-1</b> Ai	r T	ouch-Free Sensor	25/11.3	115/60/1	15	Cord	5.50	12/45.5	-
HID525A	AB-1 Ai	r E	Button Activated	25/11.3	115/60/1	15	Cord	5.50	12/45.5	-
HID525A	\W-1* Ai	r T	ouch-Free Sensor	25/11.3	115/60/1	15	Cord	5.50	12/45.5	-
HID525V	V-1 Wa	ter T	ouch-Free Sensor	25/11.3	115/60/1	15	Cord	4.30	12/45.5	120/454.3
HID525V	VB-1 Wa	ter E	Button Activated	25/11.3	115/60/1	15	Cord	4.30	12/45.5	120/454.3

\*Wall mount configuration. Does not have or accept a drip tray. Unit designed to be installed over existing sink.



(1.9 x 0.8 x 0.95 cm)






- 3 years parts and labor.
- 5 years parts on the compressor and condenser.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- Residential Applications: 1 year parts and labor




#### Without Wall Mount: HID525A(B) & HID525W(B)


Installation Note: Allow 6" space at left, back and right side for ventilation and utility connections.


All models include 7.5' power cord with NEMA 5-15P plug

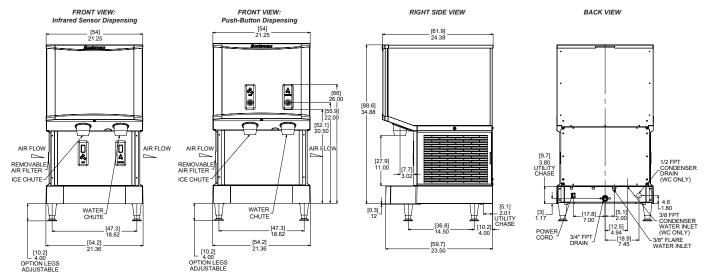

#### With Wall Mount: HID525AW

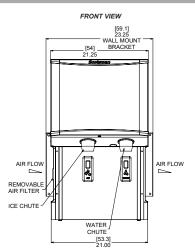

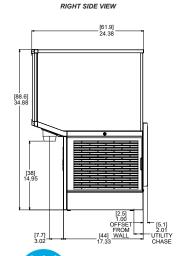

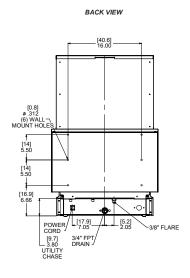

### **All Models**

Unit:

HID525A(B)-1: 21.25" x 24.38" x 35" HID525AW-1: 23.25" x 24.38" x 35" HID525W(B)-1: 21.25" x 24.38" x 35"

Shipping Carton:

HID525A(B)-1: 24.25 x 27.13 x 41.5 HID525AW-1: 24.25 x 27.13 x 41.5 HID525W(B)-1: 24.25 x 27.13 x 41.5

Shipping Weight: HID525A(B)-1

HID525A(B)-1: 208 lb / 95 kg HID525AW-1: 213 lb / 97 kg HID525W(B)-1: 208 lb / 95 kg

BTUs per hour: 6,800 Refrigerant: R-404A

# Accessories

Model Number		Description
	KLP24A	4" Adjustable legs, box of 4, plastic with metallic foot.
	HST21-A	Machine stand for HID525 and HID540, with locking reversible door and shelf.
L	HST21B-A	Machine stand for HID525 and HID540, basic version.

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.

# Operating Requirements

		Minimum	Maximum
	Air Temperatures	50°F (10°C)	100°F (38°C)
	Water Temperatures	40°F (4.4°C)	100°F (38°C)
	Potable Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)
	Electrical Voltage	-5%	+10%
ь.			

Specifications and design are subject to change without notice.

